


## temperature

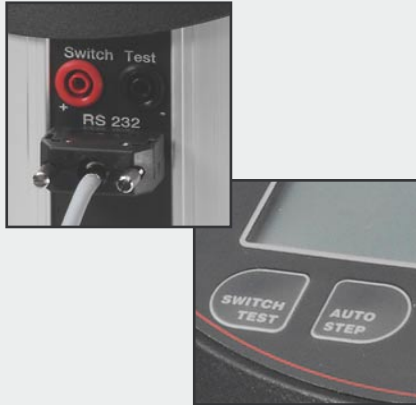

### Wide temperature range

ITC-155	-23 to 155°C (-9 to 311°F)
ITC-320	33 to 320°C (91 to 608°F)
ITC-650	33 to 650°C (91 to 1202°F)

### Improved temperature homogeneity

The unique dual-zone heating block ensures good temperature homogeneity in the critical calibration zone of the heating block

### Enhanced accuracy and stability

MVI circuitry ensures temperature stability despite mains supply variations

### Timesaving features

Fast one-key-one-function access to the automatic switch test and the step function

### High accuracy and long-term stability

Specified drift over a one year period of time. Improves the reliability of the JOFRA ITC series

### Documentation made easy

RS232 communication and JOFRACAL calibration software are included in the standard delivery

ISO 9001 Manufacturer

# JOFRA™ ITC series

## Industrial Temperature Calibrators

### Portable and easy-to-use temperature calibrator

The JOFRA ITC series is the mid-range dry-block calibrator model offered by AMETEK. The design basis for the ITC series is portability and ease-of-use supplied at a reasonable cost without sacrificing accuracy, performance, and features. The ITC series incorporates the features of the high-end ATC series with the functionality of the standard CTC series dry-block calibrators.



### PRODUCT DESCRIPTION

The ITC series employs the slim and rugged design of the CTC series. This series also features the intuitive user interface, the clear LCD display, and the functionality that is used in the successful CTC series. However, the ITC is designed with the state-of-the-art dual-zone heating block and MVI circuitry that has been adopted from the ATC series. The MVI circuitry ensures stable temperatures even when the mains supply is unstable.

The ITC series is designed for both on-site and maintenance shop use. The applications are generally critical process control but can vary based on calibration and testing requirements.


The ITC series dry-block calibrators are available in 3 different temperature ranges and all models are equipped with RS232 serial communication capabilities. The standard delivery also includes the JOFRACAL calibration PC software.

**AMETEK®**  
CALIBRATION INSTRUMENTS

**ITC-320 & ITC-650 dual-zone heating block**

The specialized block design increases the temperature homogeneity in the critical calibration zone. It also minimizes the need to insulate the sensors-under-test and makes it possible to calibrate liquid-filled and other mechanical sensors.

The main, or lower, zone ensures optimum heat dissipation throughout the entire block. The secondary, or upper, zone compensates for the heat loss from the top of the block and from the sensor-under-test.

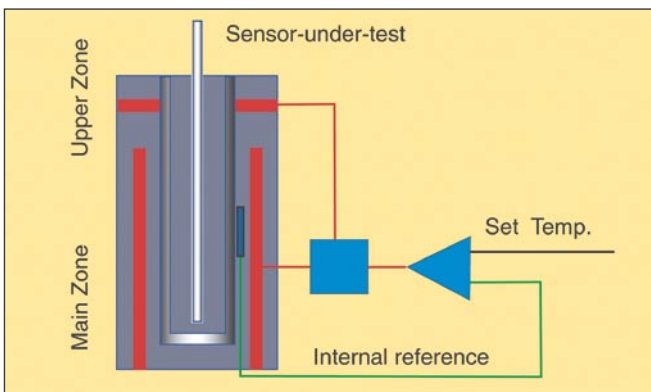


**ITC-155 heating/cooling block**

The model ITC-155 features improved Peltier elements that employ a "Multi-Stage Technology". This both improves efficiency and extends the useful life of the heating/cooling block.

**Peltier effect (ITC-155)**


In 1834, Jean Peltier, a French physicist found that an "opposite thermocouple effect" could be observed when an electric current was connected to a thermocouple. Heat would be absorbed at one of the junctions and discharged at the other junction. This effect is called the "PELTIER EFFECT".

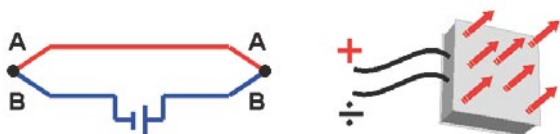

The practical Peltier element (electronic heating pump) consists of many elements of semiconductor material connected electrically in series and thermally in parallel. These thermoelectric elements and their electrical interconnections are mounted between two ceramic plates. The plates serve to mechanically hold the overall structure together and to electrically insulate the individual elements from one another.

**Maximum temperature**

From the setup menu, the user can select the maximum temperature limit for the calibrator. This function prevents damage to the sensor-under-test caused by the application of excessive temperatures. The feature also aids in reducing drift resulting from extended periods of exposures to high temperatures. This feature can be locked with an access code.

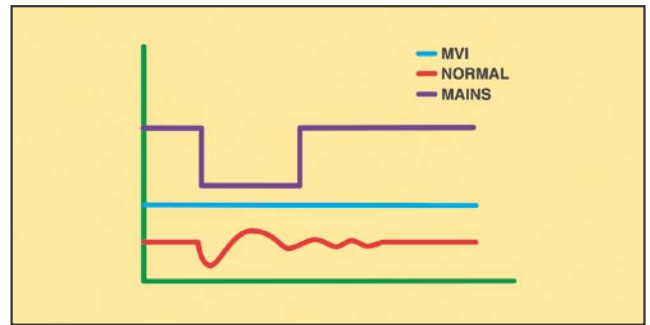

**MVI - Improved temperature stability**

MVI stands for "Mains power Variance Immunity".

Unstable mains power supplies are a major contributor to on-site calibration inaccuracies. Traditional temperature calibrators often become unstable in production environments where large electrical motors, heating elements, and other devices are periodically cycled on or off. The cycling of supply power can cause the temperature regulator to perform inconsistently leading to both inaccurate readings and unstable temperatures.

The ITC series employ the MVI, thus avoiding such stability problems. The MVI circuitry continuously monitors the supply voltage and ensures a constant energy flow to the heating elements.



### Easy-to-use, intuitive operation

All instrument controls may be performed from the front panel. The heat source is positioned away from the panel. This design helps to protect the operator.

The main functions on the ITC series are designed with one-key-one-function logic. This means that there are no sub-menus or difficult to remember multiple keystrokes necessary to access primary functions.

The easy-to-read, backlit display features dedicated icons, which help in identifying instrument conditions and operational steps.

### Set temperature

The "Up" and "Down" arrow keys allow the user to set the exact temperature desired with a resolution of 0.1°.

### Instrument setups


The ITC series stores the complete instrument setup, including: engineering units, stability criteria, resolution, display contrast, slope (ramp) rate, auto-step settings, and maximum temperature.

### Stability indicator

A bold checkmark on the display indicates that the calibrator has reached the desired set temperature and is stable. The operator may change the stability criteria and establish a greater sense of security in the calibration results. A convenient countdown timer is activated five minutes before the unit reaches stability.


### Automatic switch test

Operators can save a lot of time using the automatic thermostat test function to find values for the "Open" and "Close" temperatures. Additionally, this feature displays the hysteresis (deadband) between the two points. The feature ensures a very high repeatability when testing thermostats. Simply press the "SWITCH TEST" key to activate the function.

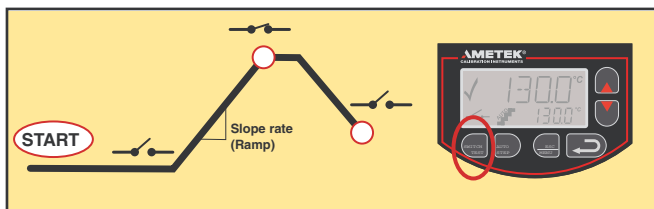

### Auto-stepping

This feature saves manpower. The operator may stay in the control room, or another remote location, monitoring the output from the sensor-under-test while the ITC series calibrator is placed in the process and automatically changes the temperature using a programmed step value and rate. Up to 9 different temperature steps may be programmed, including the hold time for each step.

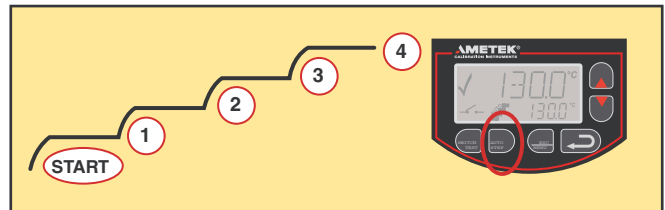


### Re-calibration/adjustments

The ITC series has a very easy and straightforward procedure for re-calibration/adjustment. There is no need for a screwdriver or PC software. The only thing you need is a reliable reference thermometer.

Place the probe in the calibrator and follow the instructions on the display. Third-party labs and calibration facilities will be able to perform this function if a certificate from an independent source is necessary. Of course, AMETEK can provide you with a traceable calibration certificate from our labs when you require a higher level of confidence.

**Simplified calibration documentation**

All ITC series calibrators are provided with the JOFRACAL calibration software. This software allows the user to customize his or her calibration routines. The software is easy-to-use so you do not have to be a programmer to configure your own calibration procedures. The software features prompts, menus, and help functions that guide you through the configuration process.

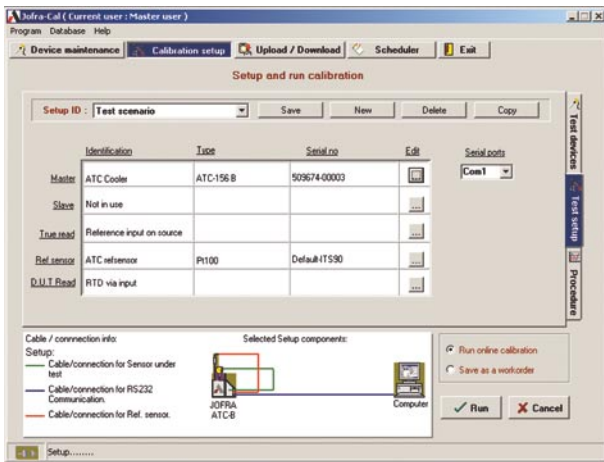

The JOFRACAL calibration software supports automatic calibration for all JOFRA dry-block calibrators equipped with an RS232 serial data interface including the JOFRA DTI-1000 digital thermometer. For semi-automatic calibrations, the software also supports liquid baths, ice points, or other dry-block heating and cooling sources. Using the software's "SCENARIO" function allows for combining instruments in virtually any configuration.

Once all calibrations are completed the JOFRACAL calibration software can be used for post-processing and printing of certificates. The calibration data collected may be stored on the personal computer for later recall or analysis.

The JOFRACAL temperature calibration software may be downloaded free of charge from our web-page [www.jofra.com](http://www.jofra.com).

Please also see more about JOFRACAL calibration software in specification sheet SS-CP-2510, which can be found at [www.jofra.com](http://www.jofra.com)



**JOFRACAL software**

Minimum hardware requirements for JOFRACAL calibration software.

- INTEL™ 486 processor (PENTIUM™ 800 MHz recommended)
- 32 MB RAM (64 MB recommended)
- 80 MB free disk space on hard disk prior to installation
- Standard VGA (800 x 600, 16 colors) compatible screen (1024 x 786, 256 colors recommended)
- CD-ROM drive for installation of the program
- 1 free RS232 serial port



**Carrying case**

The optional protective carrying case ensures safe transportation and storage of the instrument and all associated equipment.



**Heat shield - 104216**

An external heat shield is available and may be placed on top of the calibrator to reduce the hot air stream around the sensor-under-test. This is especially important for testing thermocouples having head-mounted transmitters with cold-junction compensation.



## FUNCTIONAL SPECIFICATIONS

### Mains specifications

Voltage ITC-155/320 .....	115V(90-127) / 230V(180-254)
Voltage ITC-650 .....	115V(100-127) / 230V(200-254)
Frequency, non US deliveries .....	50 Hz $\pm$ 5, 60 Hz $\pm$ 5
Frequency, US deliveries .....	60 Hz $\pm$ 5
Power consumption (max) ITC-155 .....	150 VA
Power consumption (max) ITC-320/650.....	1150 VA

### Temperature range

ITC-155	
Maximum.....	155°C / 311°F
Minimum @ ambient temp. 0°C / 32°F .....	-39°C / -38°F
Minimum @ ambient temp. 23°C / 73°F .....	-23°C / -9°F
Minimum @ ambient temp. 40°C / 104°F .....	-10°C / 14°F
ITC-320 .....	33 to 320°C / 91 to 608°F
ITC-650 .....	33 to 650°C / 91 to 1202°F

### Resolution (user-selectable)

All temperatures .....	1° or 0.1°
------------------------	------------

### Stability

ITC-155 .....	$\pm$ 0.03°C / $\pm$ 0.05°F
ITC-320 .....	$\pm$ 0.03°C / $\pm$ 0.05°F
ITC-650 .....	$\pm$ 0.04°C / $\pm$ 0.07°F

Measured after the stability indicator has been on for 10 minutes.  
Measuring time is 30 minutes.

### Time to stability (approximate)

All models .....	10 minutes
------------------	------------

### Accuracy

ITC-155 A .....	$\pm$ 0.25°C / $\pm$ 0.45°F
ITC-320 A .....	$\pm$ 0.3°C / $\pm$ 0.54°F
ITC-650 A.....	$\pm$ 0.5°C / $\pm$ 0.9°F

12 month period. Specification by use of the internal reference.

### Radial homogeneity (difference between holes)

ITC-155 A .....	0.03°C / 0.05°F
ITC-320 A .....	0.07°C / 0.13°F
ITC-650 A.....	0.1°C / 0.18°F

### Immersion depth

ITC-155 A .....	6.3 in / 160 mm
ITC-320 A/ ITC-650 A .....	5.9 in / 150 mm

### Heating time

ITC-155	
-20 to 23°C / -4 to 73°F .....	4 minutes
23 to 155°C / 73 to 311°F.....	14 minutes
-20 to 155°C / -4 to 311°F .....	18 minutes
ITC-320	
50 to 320°C / 122 to 608°F.....	7 minutes
ITC-650	
50 to 650°C / 122 to 1202°F.....	25 minutes

### Cooling time

ITC-155	
155 to 100°C / 311 to 212°F.....	4 minutes
155 to 23°C / 311 to 73°F .....	14 minutes
23 to -20°C / 73 to -4°F .....	23 minutes
155 to -20°C / 311 to -4°F.....	37 minutes

### ITC-320

320 to 100°C / 608 to 212°F .....	30 minutes
320 to 50°C / 608 to 122°F .....	60 minutes

### ITC-650

650 to 100°C / 1202 to 212°F .....	56 minutes
650 to 50°C / 1202 to 122°F.....	95 minutes

### Switch input (dry contact)

Test voltage .....	Maximum 5 VDC
Test current .....	Maximum 2.5 mA

## PHYSICAL SPECIFICATIONS

### Instrument dimensions (L x W x H)

.....	241 x 139 x 375 mm / 9.5 x 5.5 x 14.8 in
-------	--

### Instrument weight

ITC-155 .....	7.6 kg / 16.8 lb
ITC-320 .....	6.5 kg / 14.3 lb
ITC-650 .....	8.5 kg / 18.7 lb

### Insert dimensions

ITC-155 diameter.....	20 mm / 0.79 in
ITC-155 length.....	150 mm / 5.91 in
ITC-320/650 diameter.....	1.18 in / 30 mm
ITC-320/650 length.....	6.3 in / 160 mm

### Weight of non-drilled insert (approximate)

ITC-155.....	4.6 oz / 130 g
ITC-320/650.....	33.2 oz / 940 g

### Shipping (including optional carrying case)

Weight: ITC-155 .....	30.9 lb / 14.0 kg
Weight: ITC-320 .....	30.2 lb / 13.7 kg
Weight: ITC-650.....	34.6 lb / 15.7 kg
Size: L x W x H.....	490 x 220 x 405 mm / 19.3 x 8.7 x 15.9 in

### Shipping (without carrying case)

Weight: ITC-155 .....	24.3 lb / 11.0 kg
Weight: ITC-320 .....	23.6 lb / 10.7 kg
Weight: ITC-650.....	28.0 lb / 12.7 kg
Size: L x W x H.....	460 x 216 x 405 mm / 18.1 x 8.5 x 15.9 in

### Shipping (carrying case only)

Weight: .....	11 lb / 5.0 kg
Size: L x W x H.....	490 x 220 x 405 mm / 19.3 x 8.7 x 15.9 in

### Miscellaneous

Serial data interface .....	RS232 (9-pin Male)
Operating temperature .....	0 to 40°C / 32 to 104°F
Storage temperature .....	-20 to 60°C / -4 to 140°F
Humidity .....	0 to 90% RH
Protection class .....	IP-10

**PREDRILLED INSERTS FOR ITC SERIES - 4 MM REFERENCE HOLE**

JOFRA dry-block insert compatibility and materials:  
 ATC-320 = ATC-650 = ITC-320 = ITC-650 (made of brass)  
 ATC-155 = ATC-156 (made of aluminum)  
 ATC-157 = ITC-155 (made of aluminum)

ATC-140 = ATC-250 (made of aluminum)  
 All specifications on hole sizes are referring to the outer diameter of the sensor-under-test.  
 The correct clearance size is applied in all predrilled inserts.

Spare part no. for predrilled inserts with 4 mm reference hole			
Probe diameter	Insert code <sup>1</sup>	Instruments	
		ITC-155 A	ITC-320/650 A
3 mm	003	123270	105622
4 mm	004	123271	105624
5 mm	005	123272	105626
6 mm	006	123273	105628
7 mm	007	123274	105630
8 mm	008	123275	105632
9 mm	009	123276	105634
10 mm	010	123277	105636
11 mm	011	123278	105638
12 mm	012	123299 <sup>2</sup>	105640
13 mm	013	123300 <sup>2</sup>	105642
14 mm	014	N/A	105644
15 mm	015	N/A	105646
16 mm	016	N/A	105648
Package of the above inserts	-	124699	124701
Set of insulation plugs	-	123374	N/A

Spare part no. for predrilled inserts with 4 mm reference hole			
Probe diameter	Insert code <sup>1</sup>	Instruments	
		ITC-155 A	ITC-320/650 A
1/8 in	125	123279	105676
3/16 in	187	123280	105678
1/4 in	250	123281	105680
5/16 in	312	123282	105682
3/8 in	375	123283	105684
7/16 in	437	123301 <sup>2</sup>	105686
1/2 in	500	123302 <sup>2</sup>	105688
9/16 in	562	N/A	105690
5/8 in	625	N/A	105692
Package of the above inserts	-	124700	124702
Set of insulation plugs	-	123374	N/A

- Note: All inserts (metric and inches) are supplied with a hole for the 4 mm OD reference probe.
- Note: All inserts (metric and inches) for ITC-155 are supplied with a matching insulation plug.
- Note 1: Use the insert code, when ordered as the standard insert together with a new calibrator.
- Note 2: ITC-155 : 12 mm, 13 mm, 7/16 in and 1/2 in inserts are delivered without the 4 mm reference hole, but supplied with a matching insulation plug.

**PREDRILLED INSERTS FOR ITC SERIES - 1/4 IN REFERENCE HOLE**

Spare part no. for predrilled inserts with 1/4 in (6.35 mm) reference hole			
Probe diameter	Insert code <sup>1</sup>	Instruments	
		ITC-155 A	ITC-320/650 A
3 mm	803	125290	125259
4 mm	804	125291	125261
5 mm	805	125292	125263
6 mm	806	125293	125265
7 mm	807	125294	125267
8 mm	808	125295	125269
9 mm	809	N/A	125271
10 mm	810	N/A	125273
11 mm	811	N/A	125277
12 mm	812	123299 <sup>1</sup>	125279
13 mm	813	123300 <sup>1</sup>	125281
14 mm	814	N/A	125283
15 mm	815	N/A	125285
Package of the above inserts	-	125387	125388
Set of insulation plugs	-	125510	N/A


Spare part no. for predrilled inserts with 1/4 in (6.35 mm) reference hole			
Probe diameter	Insert code <sup>1</sup>	Instruments	
		ITC-155 A	ITC-320/650 A
1/8 in	901	125314	125296
3/16 in	902	125315	125298
1/4 in	903	125316	125300
5/16 in	904	125317	125303
3/8 in	905	N/A	125305
7/16 in	906	123301 <sup>1</sup>	125307
1/2 in	907	123302 <sup>1</sup>	125309
9/16 in	908	N/A	125311
Package of the above inserts	-	125390	125391
Set of insulation plugs	-	125510	N/A

- Note: All inserts (metric and inches) are supplied with a hole for the 1/4 in OD reference probe.
- Note: All inserts (metric and inches) for ITC-155 are supplied with a matching insulation plug.
- Note 1: Use the insert code, when ordered as the standard insert together with a new calibrator.
- Note 2: ITC-155: 12 mm, 13 mm, 7/16 in and 1/2 in inserts are delivered without the 1/4 in reference hole, but supplied with a matching insulation plug.

**UNDRILLED INSERTS FOR ITC SERIES**

Inserts, undrilled		
Inserts	Instruments	
	ITC-155 A	ITC-320/650 A/B
5-pack, undrilled inserts	123286	122719
5-pack, undrilled inserts with a 4 mm hole for the reference probe	123285	122721
5-pack, undrilled inserts with a 1/4 in hole for the reference probe	125313	125287
One undrilled insert	N/A	N/A
Undrilled insulation plug	123304	N/A

4 mm Reference probe hole










1/4 in Reference probe hole



**MULTI-HOLE INSERTS FOR ITC SERIES - METRIC (MM)**

Spare part no. for multi-hole inserts - metric (mm)		
Insert code <sup>1</sup>	Instruments	
	ITC-155 A	ITC-320/650 A/B
M01	123294	122750
M02	123295	122752
M03	123296	122754
M04	N/A	122756
M06	125377	N/A
M07	125378	N/A
M08	125379	N/A





Note: All multi-hole inserts (metric and inches) for ITC-155 are supplied with a matching insulation plug.  
 Note: Remember to use matching insulation plugs.  
 Note 1: Use the insert code, when ordered as the standard insert together with a new calibrator.

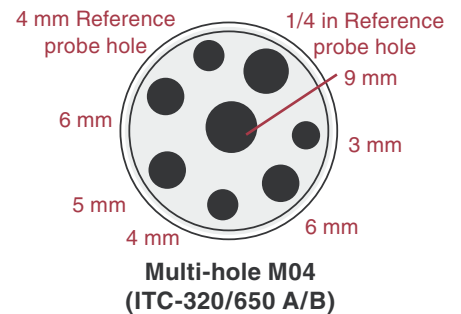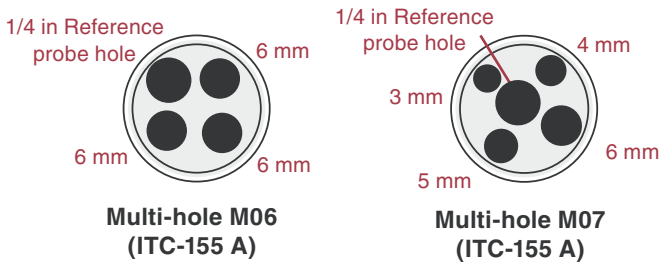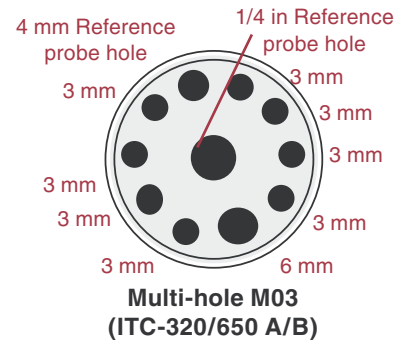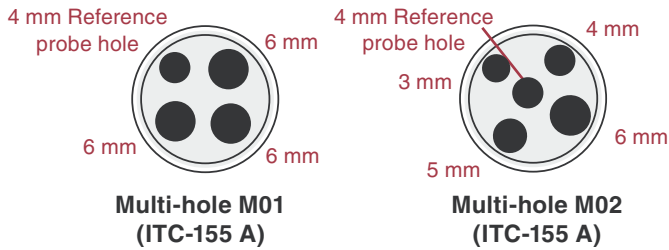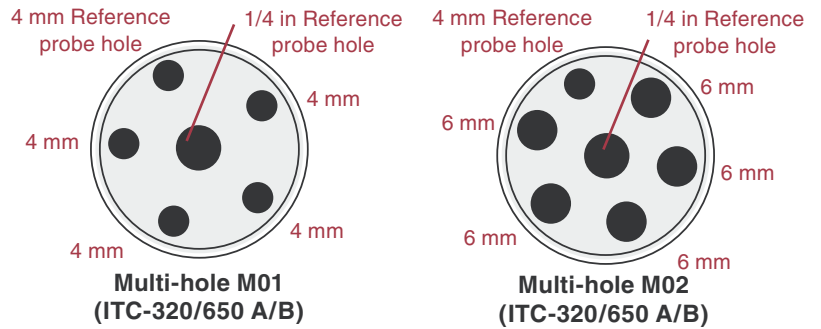

**MULTI-HOLE INSERTS FOR ITC SERIES - IMPERIAL (INCH)**

Spare part no. for multi-hole inserts - imperial (inch)		
Insert code <sup>1</sup>	Instruments	
	ITC-155 A	ITC-320/650 A/B
M02	N/A	N/A
M04	123297	N/A
M05	123298	122758
M06	N/A	122760
M09	125380	N/A

Note: All multi-hole inserts (metric and inches) for ITC-155 are supplied with a matching insulation plug.  
 Note: Remember to use matching insulation plugs.  
 Note 1: Use the insert code, when ordered as the standard insert together with a new calibrator.

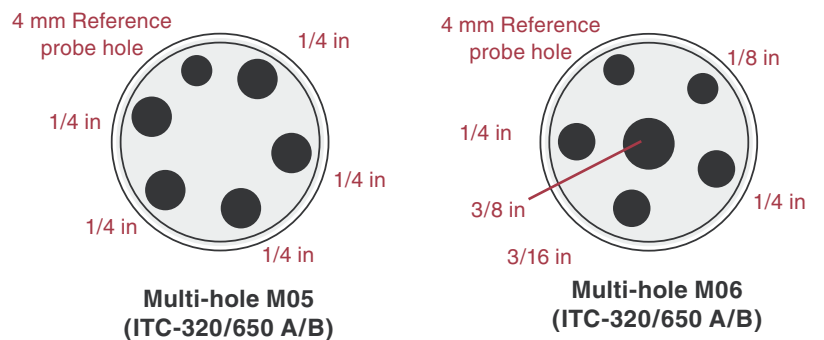

## ORDERING INFORMATION

### Model ITC series dry-block temperature calibrators

#### Order number Description

ITC155A	<b>Base model number</b> ITC-155 series, -23 to 155°C (-9 to 311°F)
ITC320A	ITC-320 series, 50 to 320°C (122 to 608°F)
ITC650A	ITC-650 series, 50 to 650°C (122 to 1202°F)
	<b>Power supply (US deliveries 60 Hz only)</b> 115VAC, 50/60 Hz 230VAC, 50 Hz
	<b>Mains power cable type</b> A EUROPEAN, 230V B USA/CANADA, 115V C UK, 240V D SOUTH AFRICA, 220V E ITALY, 220V F AUSTRALIA, 240V G DENMARK, 230V H SWITZERLAND, 220V I ISRAEL, 230V
	<b>Insert type and size</b> 1 x Insert for dry-block configuration (please see the previous insert pages for the right insert codes)
	<b>Options</b> C Carrying case F Traceable certificate (standard for Europe, Asia, Australia and Africa) G NIST traceable certificate (standard for Western Hemisphere) H Accredited certificate X Placeholder character for unused option
	<b>Sample order number</b> JOFRA ITC-320 A series dry-block calibrator, 115VAC power with US power cord and insert: Pre-drilled multi-hole type 6 (4 mm ref. hole, 1 x 1/8 in, 2 x 1/4 in, 1 x 3/16 in, 1 x 3/8 in) including carrying case and NIST traceable certificate.

ITC320A 115 B M06 CGXX

## STANDARD DELIVERY

- ITC dry-block calibrator (user specified)
- Mains power cable (user specified)
- Traceable certificate - temperature performance
- Insert (user specified)
- 3 pcs. insulation plugs for 5, 8, 11 mm sensors (ITC-155 only)
- Tool for insertion tubes
- RS232 cable
- JOFRACAL calibration software
- User manual
- Reference manual (English)
- Test cables (1 x red, 1 x black)

## ACCESSORIES

Part no.	Description
122832	Cleaning brush, 4 mm (3/Pkg)
60F174	Cleaning brush, 6 mm (3/Pkg)
122822	Cleaning brush, 8 mm (3/Pkg)
104216	Heat shield
123304	Undrilled insulation plug (ITC-155 series only)

**AMETEK**  
CALIBRATION INSTRUMENTS

AMETEK Calibration Instruments is one of the world's leading manufacturers and developers of calibration instruments for temperature, pressure and process signals as well as for temperature sensors both from a commercial and a technological point of view.

#### Headquarter:

**AMETEK Denmark A/S**  
(Sales, Europe and the Middle East)  
Gydevang 32-34 • 3450 Allerød • Denmark  
Tel: +45 4816 8000 • ametek@ametek.dk

[www.ametekcalibration.com](http://www.ametekcalibration.com)  
[www.jofra.com](http://www.jofra.com)

Information within this document is subject to change without notice.  
©2005, by AMETEK, Inc., [www.ametek.com](http://www.ametek.com). All rights reserved.

Pub code SS-CP-2286-US Issue 0605

#### Sales offices:

**AMETEK T&CI - Americas (Sales, The Americas)**  
Tel: +1 518 689 0222 • jofra.info@ametek.com

**AMETEK Singapore Pte. Ltd. (Sales, Asia)**  
Tel: +65 6 484 2388 • aspl@ametek.com.sg

**AMETEK Inc. Beijing Rep. Office (Sales, China only)**  
Tel: +86 10 8526 2111 • jofra@ametek.com.cn

**AMETEK GmbH (Sales, Germany only)**  
Tel: +49 2159 91360 • info@ametek.de

**AMETEK Lloyd Instruments (Sales, UK only)**  
Tel: +44 (0) 1489 486 404 • jofra@ametek.co.uk



#### AMETEK Calibration Instruments

offers a complete range of calibration equipment for temperature, pressure, and signal - including calibration software.

#### JOFRA Temperature standards

Portable precision thermometer. Dry-block and liquid bath calibrators: 4 series, with more than 20 models - featuring speed, portability, accuracy and advanced documenting functions with JOFRACAL temperature calibration software.

#### JOFRA Pressure standards

Convenient electronic systems ranging from -1 to 700 bar (25 inHg to 10,000 psi) - multiple choices of pressure ranges, pumps and accuracies, fully temperature-compensated for problem-free and accurate field use.

#### JOFRA Signal calibration

Process signal measurement and simulation for easy control loop calibration and measurement tasks - from handheld field instruments for multi or single signals to laboratory reference level bench top instruments.

#### JOFRA / JF Marine Instruments

A complete range of calibration equipment for temperature, pressure and signal, approved for marine use.

#### FP temperature sensors

A complete range of temperature sensors for industrial and marine use.

*...because calibration is  
a matter of confidence*